


SHEET # 21

NX STYLE CURRENT LIMITING FUSES

For Use up to 38KV

Dimensions in Inches

Optional Indicator

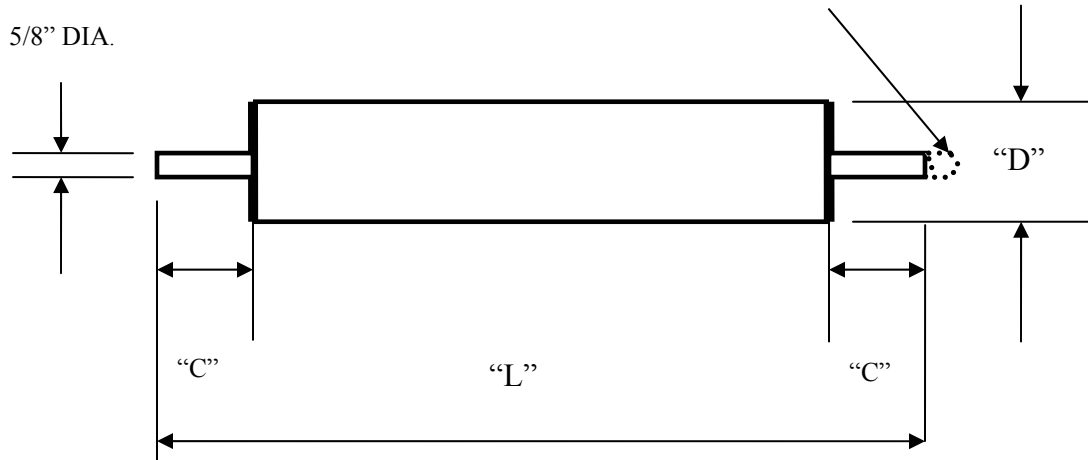

Item	KV	Amp Range	Mounting Code	"C"	"D"	"L"	I.R. Amps
1	4.3	18-35	4	1	1-1/8	10	50,000
2	4.3	45-105	4	1	2	10	50,000
3	5.5	6-20	4	1	1-1/8	10	50,000
4	5.5	21-75	4	1	2	10	50,000
5	8.3	1.5-15	4	1	1-1/8	10	50,000
6	8.3	18-40	4	1	2	10	50,000
7	8.3	50-100	5	1-3/16	3-7/16	14-11/16	50,000
8	15	1.5-4.5	5	1	1-1/8	14-5/16	50,000
9	15	4-40	5	1	2	14-5/16	50,000
10	15	50-100	6	1-3/16	3-7/16	17-1/2	50,000
11	23	6-40	6	1	2	17-1/8	35,000
12	27	6-50	9	1-3/16	3-7/16	27-3/8	35,000
13	38	6-50	10	1-3/16	3-7/16	35-3/8	35,000